



EZ2Cover AF-993, 4 IN 1 PREPCOAT 15 LITRE | PRIMER SEALER UNDERCOAT

Uses

It is designed for use as an undercoat based on Acrylic-Styrene resin and white pigment, with excellent adhesion to most substrates such as plasterboard, yellow tongue, plywood, timber, render, cement sheet, etc. It is a very good stain blocker need to be tested on some stained substrates; it can be sprayed or rolled as a ceiling paint. Recommended for Primer, Undercoat, Ceiling paint, and Blocker.

Environment & Health

Follow the appropriate Occupational Health and Safety guidelines applicable to the location where the application is undertaken. For more information, please refer to the safety data sheets for the individual components



UV Resistant



Exterior / Interior Paint



Water Base



Environmentally Friendly

CHEMSTUK Pty Ltd
1/11 Industrial Avenue
Thomastown
Tel: +61 3 9936 0531
www.chemstuk.com.au

Packaging

The product is supplied in full units as a component pack.

EZ2Cover	15 Litre
----------	----------

Curing Times

Dry to touch	30 minutes
Hard dry	12 hours
Full curing	24 hours
Recoat interval, Min	12 hours
Recoat interval, Max	24 hours

Additional Information

Colours	White
Finish	Flat
Solid Content (by Weight)-%	78±2
Theoretical spreading rate	11.3 m ² /lit 30 Mic. 475 sq ft./US gallon- 1.18mils
Flashpoint	Not applicable (water-based)
Specific gravity	1.4 kg/lit-10.08 lbs/US gallon
V.O.C.	Max. 76 gr/lit
Shelf life	1 Year (25°C/77°F) from the time of production. Depending on storage conditions, mechanical stirring may be necessary before use.


Substrate Requirements

New adhesion promoter: clean the surface, apply EZ2Cover AF-993 well without sanding; light sanding helps stick even better.

Surface Preparation

All surfaces must be thoroughly cleaned and free of all loose dirt, grease, stains, mould, surface chalk, and loose or flaking paint. Wash unpainted

➤ EZ2Cover is a multipurpose water-based 4-in-1 undercoat that can also be used as ceiling paint and as a wall primer and blocker. EZ2Cover is very high build, meaning it is perfect for filling and sanding.

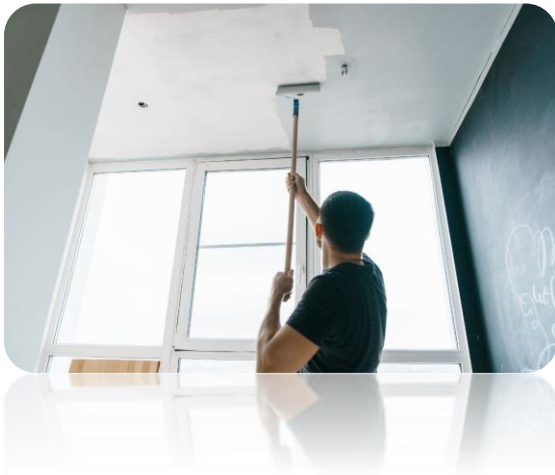

Timber surfaces with a suitable timber cleaner to remove excess tannins or greyed timber. New timber surfaces should also be sanded smooth and dusted down prior to priming. Fill nail holes, imperfections, and cracks with a suitable filler, sand, and dust off. For set plaster or plaster and glass, use a sealer binder as the precoat.

Mixing

Mix with a slow-speed drill and helical spinner head for 60 seconds. Mix until uniform.



Application Method

Method	Airless sprays	Air spray	Brush (touch-up)
Thinner (max. vol.)	Water (5%)	Water (5%)	Water (5%)
Pump ratio minimum	40:1		
Tip size	021"	1.6 mm	217
Tip pressure	150 bar/2200 Psi	4 – 5 bar	
Cleaning of tools	Water		
Indicated thickness, dry film	70 microns		
Indicated thickness, wet film	90 microns		

Conditions: Do not apply when relative humidity exceeds 80% or when the surface to be coated is less than 3°C above the dew point.

Storage

Time	12 Months in Unopened Packs.
Temperature	Storage temperature between 5°C and 35°C.
Protection	Should be stored indoors and protected from frost, weather, moisture, direct sunlight, and contamination ingress.

Remarks

Preceding Coat	-
Subsequent Coat	EZ2KV (if necessary), Intopa, Neverpeeled, Trim

A completely clean surface is mandatory to ensure inter-coat adhesion, especially at long recoating intervals. Any dirt, oil, and grease must be removed, e.g., with a suitable detergent. Salts should be removed by freshwater hosing. To check the adequate quality of the surface cleaning, a test patch is recommended before actual recoating.

Film Thickness

May be specified at a different film thickness than indicated, depending on the purpose and area of use.

This will alter the spreading rate and may influence drying time and recoating intervals.

Recoating and drying/curing time


2 hours @25°C/50% relative humidity. Under cooler or more humid conditions, allow longer drying times. If recoating with a solvent-based paint, allow EZ2Cover AF-993 to dry for 24 hours before recoating.

Safety

Refer to SDS for Dangerous Goods classification.

Application Equipment

The use of correct application equipment is critical, as incorrect application tools can result in poor finishing and incorrect material consumption. Always test the application equipment prior to commencing work. The following equipment is recommended for this application.

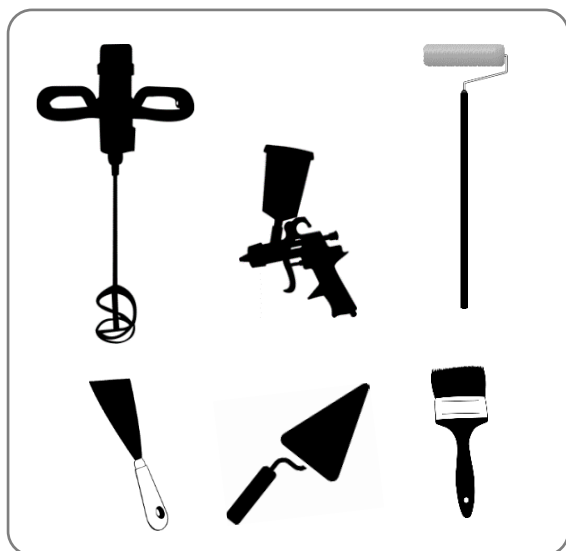

DISCLAIMER

This Technical Data Sheet is to be used as a guide only; it is NOT a specification. Chemstuk Pty Ltd has no control over the use or storage of this product and therefore does not accept liability in this regard. Any verbal advice given should not be regarded as authoritative information. This information is subject to change without notice; all applicators should ensure they have current information. This product is intended for the use only of skilled tradesmen and, where applicable, statutorily licensed tradesmen experienced and trained in the use of this product. Due to differences in substrates, application methods and local conditions, purchasers of these products must ensure that they are suitable for their specific application before using these products. While the information contained in the TDS and SDS is accurate to the best of our knowledge, Chemstuk Pty Ltd cannot guarantee that the information contained is wholly comprehensive. Subject to the provisions of the Trade Practices Act, the company's liability in relation to defective products shall be limited to replacement of the product if the product is proven to be defective.